



SECTION: TYPICAL SECTION

SCALE: 1:40

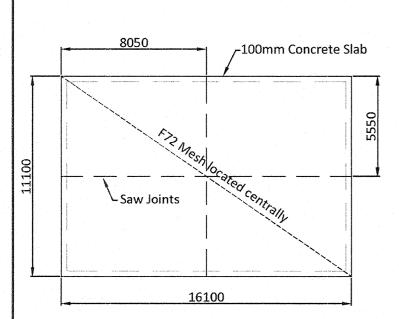

PLAN: SET OUT SCALE: 1:200

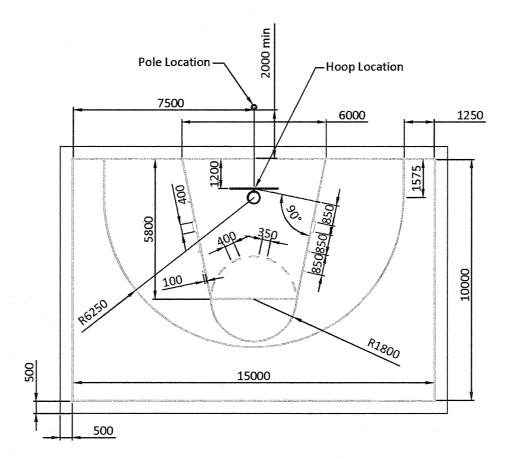

PLAN: LINE MARKING SCALE: 1:150

NOTES:

- 1. Location to be marked out or approved by an lpswich City Council representative.
- 2. Any batters to slab side must be max. 1:6
- 3. Subgrade to be proof rolled. Weak areas to excavated and refilled.
- 4. Fill areas to be min 250mm compacted CO CBR60 roadbase at 90% compaction.
- 5. All construction and materials to AS3600-2009
- 6. Damp proof membrane 0.2mm polyethylene film to be placed under concrete slab and beams with 200mm laps taped at joints.
- 7. Reinforcing SL72 square mesh grade 500 to comply with AS4671-2001.
- 8. Welding of reinforcement is not permitted.
- 9. Saw cut into equal sections 25mm deep within 24hrs of concrete pour.
- 10. Line marking to be 50mm wide.

HOOP SPECIFICATIONS:

- 1. Supply and install hoop, backboard and post in accordance with Australian Basketball Federation Guidelines.
- 2. Engineer's certification required for hoop, post, backboard and footing.
- 3. Install to manufacturer's written instructions

REVISIONS							
Г	AMENDMENT	INITIALS	DATE		ANENDMENT	INITIALS	DATE
F				L			
E				K			
D				J			
C				1			
В	Notes Altered			Н			
(A	ORIGINAL ISSUE			G			



IPSWICH CITY COUNCIL

45 Roderick St P.O. Box 191 Ipswich QLD 4305 Australia





STANDARD DRAWING

SPORTS AMENITY
BASKETBALL HALF COURT

S	P	.69

PARKS

REV: B DRAWER: 100